



Lonely Lion


Low Bed Semi Trailer





Lonely Lion

Max 13 Meter Low Bed Semi Trailer

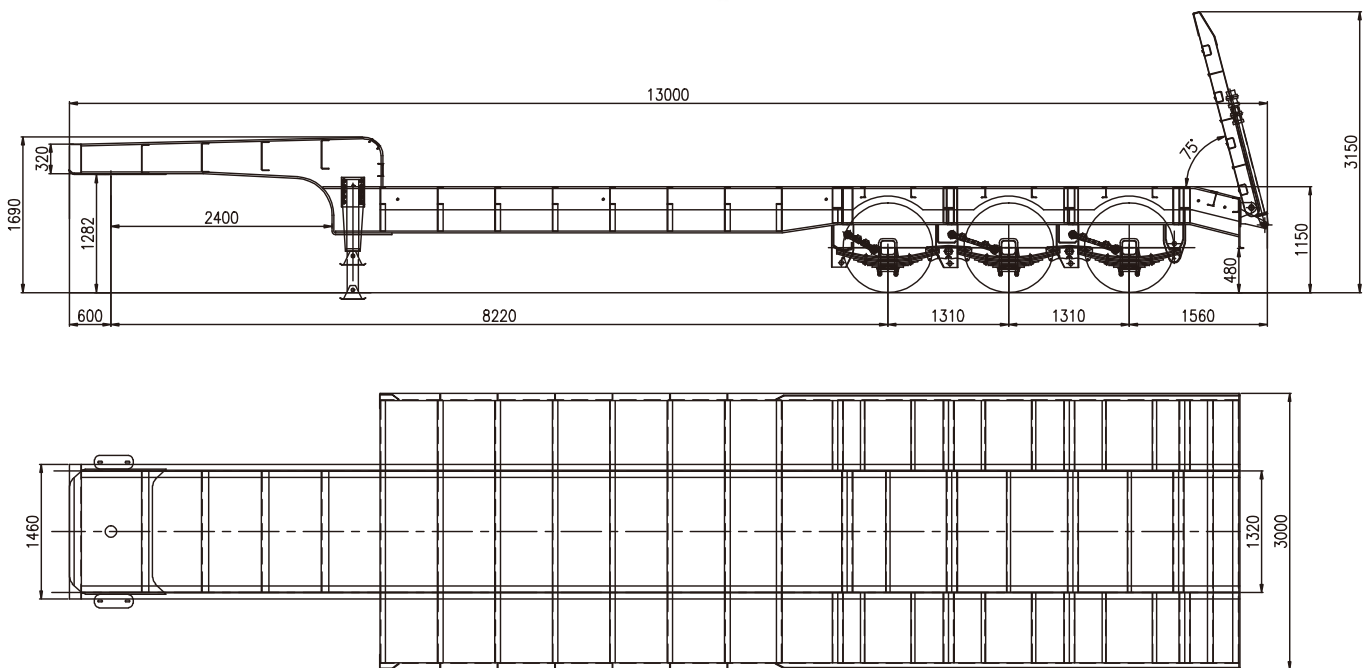

Note: The photo and drawing are for reference only. The final design of the semi trailer is upon your specific requirements.



Max 13 Meter Low Bed Semi Trailer

Model	MAX/ST/LB/13/001	
Weights	Tare Weight	9,500 KG
	Payload	50,000 KG
	Gross Vehicle Weight	59,500 KG
Dimensions	13000mm (Length) × 3000mm (Width) × 1800mm (Height)	
Weight Distribution	At King pin: Approx 30 – 35 % of GWV	
	At Rear Axle: Approx 65 – 70 % of GVW	
Upper Coupler	Max king pin, 3.5" bolted type	
Landing Gear	MAX brand 2 speed, manual operating, heavy duty landing gear landing gears	
Ramp	Manually operated spring ramp	
Floor	4 mm thick checkered steel	
Main Beams	Two Q345B* steel fabricated I-Beams Top flange 16 mm thick, bottom flange 18 mm thick Web height 500 mm, web thickness 10 mm	
Side Rails	25 mm thick channel steel	
Axles	3 Axles*, MAX brand, each axle capable of carrying minimum 13 tons at 120 km/h speed.	
Suspensions	Multi-leaf spring suspensions, 10 lines	
Brake system	6 air tanks, dual air brake system, WABCO relay emergency valve, without ABS	
Tires	8.25R20 Triangle tires, 12 units	
Electrical	24-Volt sealed wiring harness, 7-pin connector at front	
Side Lights	Four side marker lamps per side, amber color	
Rear Lights	Brake lights	Two, red color
	Turn signal lights	Two, amber color
	Reverse lights	Two, white color
	License plate lamp	One, white color
	Fog lamp	One, red color
Bumper	Standard steel bumper	
Toolbox	1 unit	
Spare wheels carriers	1 unit	
Reflectors	Two triangular red reflectors at rear. Conspicuity reflective tapes on each side	
Painting	Sandblasting, one coat of primer, two coats of finish painting, and color as per customer's request.	